

# STELLA FR & REFLECTION FR

Vertical And Roller Blind Fabric Specification

## KEY FEATURES:

<b>Fabric composition:</b>	29% PVC, 71% Fibreglass
<b>Fire retardancy:</b>	BS5867 - 2, Type B : 2008 for fire retardancy when tested in accordance with BS5438 : 1989
<b>Shading:</b>	Blockout - Recommended for computer environments
<b>Moisture resistance:</b>	Recommended for moist conditions

## STANDARD SPECIFICATIONS:

<b>Colour range:</b>	2
<b>Louvre widths available:</b>	89mm (3 1/2")
<b>Roller fabric width:</b>	180cm (72") nominal
<b>Typical fabric weight:</b>	390gsm (+/- 10)
<b>Fabric thickness:</b>	0.30mm - nominal
<b>Colourfast:</b>	Conforms to BS5867 - 1 : 2004 for light fastness to Grade 6 minimum when tested in accordance with ISO 105 - B02 : 1999
<b>Care instructions:</b>	Wipe with damp sponge; Do not wash; Do not tumble dry; Do not dry clean; Do not iron

### Stella FR

COLOUR	HEAT		LIGHT		S-C
	T	R	T	R	
Ivory	0	76	0	85	0.45
Vanilla	0	65	0	60	0.41

T = % Transmitted : R = % Reflected : S-C = Shading Co-efficient. Shading Co-efficients are expressed as a decimal between 0 and 1. The lower the figure, the higher the shading efficiency of the blind.

### Reflection FR

COLOUR	HEAT		LIGHT		S-C
	T	R	T	R	
Ecrú	0	65	0	60	0.41
Silk	0	76	0	85	0.45

T = % Transmitted : R = % Reflected : S-C = Shading Co-efficient. Shading Co-efficients are expressed as a decimal between 0 and 1. The lower the figure, the higher the shading efficiency of the blind.

## STELLA FR

Vertical and Roller Blind Fabric Specification



Ivory




Vanilla

## REFLECTION FR

Vertical and Roller Blind Fabric Specification



Ecrú

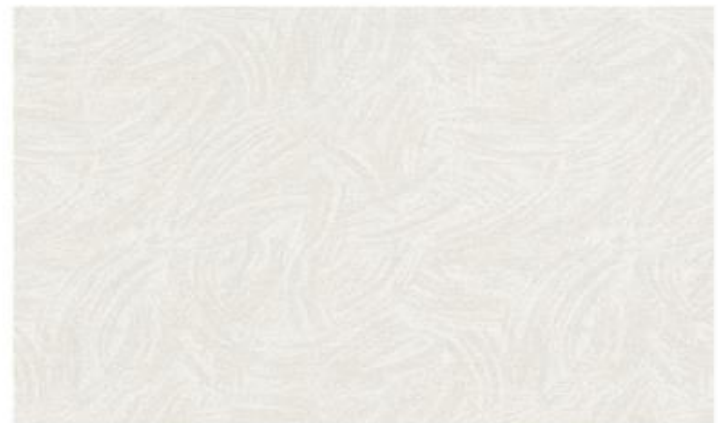

Silk



SK Systèmes  
Unit A1  
Yelverton Business Park  
Yelverton  
Devon  
PL20 7PE

Tel : +44 (0)1822 859 178  
Fax : +44 (0)1822 854 344  
E-mail : sales@skssystemes.net  
Web: www.skssystemes.net

#### This data is based on:

Tests conducted using double glazed 6mm float glass with 12mm air space. Blinds are fully closed.

Shading Co-efficients are calculated for radiation at normal incidence. Standard U value is 2.75 W/M 2k = 0.49Btu/ft2hx°F.

**Important:** Performance data has been compiled with great care using the latest techniques. However, it is advisable to check actual suitability of fabrics for a particular application before use.

In line with our commitment to product development, specifications may be subject to change without notice.